


INDOOR FIXED INSTALLATION
HD FINE PITCH LED DIGITAL WALL DISPLAY
HIGH QUALITY SEAMLESS CONNECTION
POWER & DATA REDUNDANCY DESIGN
MODULE, PSU TOTALLY FRONT ACCESS DESIGN
WITH CE/EMC-A/ROHS/FCC/UL CERTIFIED




KEY FEATURES

-  ENERGY SAVING
-  HIGH-DEFINITION DISPLAY
-  LIGHT WEIGHT
-  EASY MAINTENANCE
-  ULTRA SLIM DESIGN
-  FAST INSTALLATION

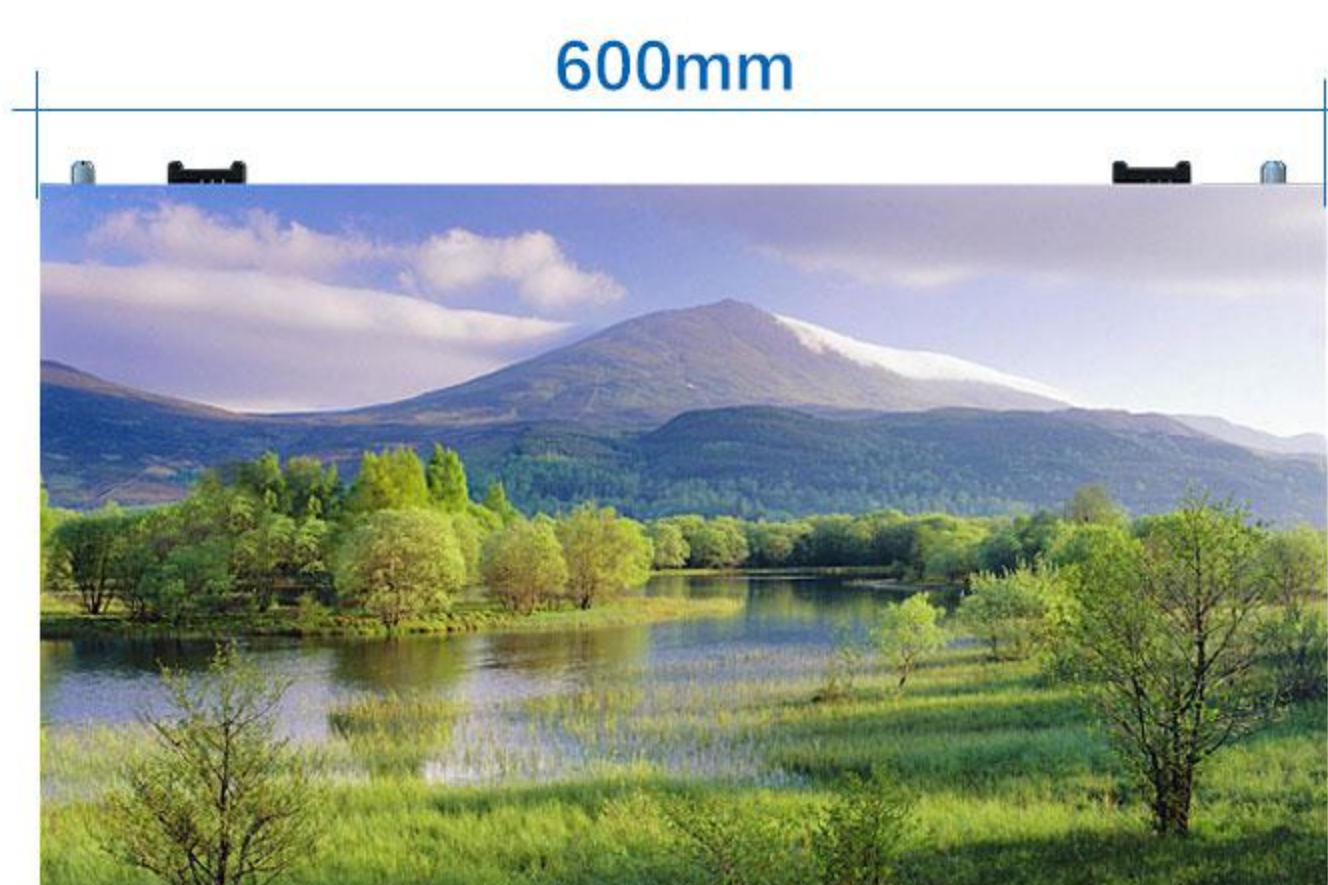

ITEMS	U121	U151	U181
LED Configuration	SMD1010	SMD1010	SMD1515
Pixel Pitch (mm)	1.25	1.562	1.875
Module Resolution(dots)	240x135	192x108	160x90
Panel Resolution(dots)	480x270	384x216	320x180
Driving Mode(Scan)	27S	27S	30S
Pixel Density (dots /m ²)	640000	409600	284444
Module Size (W x H x D) /(mm)	300x168.75x15	300x168.75x15	300x168.75x15
Panel Dimension (W x H x D) /(mm)	600x337.5x45	600x337.5x45	600x337.5x45
Panel Material	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Panel Module Composition(W xH)	2x2	2x2	2x2
Panel Weight(Per/ kg)	6.3	6.3	6.3
Module Weight(Per/kg)	0.45	0.45	0.45
Minimum Viewing Distance	≥1.5m	≥1.9m	≥2.3m
Contrast Ratio	1000 : 1	1000 : 1	1000 : 1
Color processing (Bit)	13bit to 16bit	13bit to 16bit	13bit to 16bit
Grey Level	16384	16384	16384
Refresh Rate (Hz)	≥1920Hz-3840Hz	≥1920Hz-3840Hz	≥1920Hz-3840Hz
Brightness (nit)	700	700	700
Viewing Angle (H/V)	160°/160°	160°/160°	160°/160°
Input Voltage (V)	AC 110V-220V	AC 110V-220V	AC 110V-220V
Input Power Frequency (Hz)	50/60	50/60	50/60
Max Power (W/m ²)	600	600	600
Average Power (W/m ²)	200	200	200
Storage Temperature (°C)	From -10 to 40	From -10 to + 40	From -10 to + 40
Operating Temperature (°C)	From-20 to 50	From -20 to + 65	From -20 to + 65
Storage Humidity (RH)	10%~90%	10%~90%	10%~90%
Operating Humidity (RH)	10%~90%	10%~90%	10%~90%
IP Rating	IP3X/IP31	IP3X/IP31	IP3X/IP31
Lifetime (hrs)	100000	100000	100000
Usage Environment	Indoor Fixed Installation	Indoor Fixed Installation	Indoor Fixed Installation
Panel Maintenance Method	Front Maintenance	Front Maintenance	Front Maintenance
CE/ RoHS/CCC/UL/ISO9001			

Seamless Connection Secure connection between cabinets

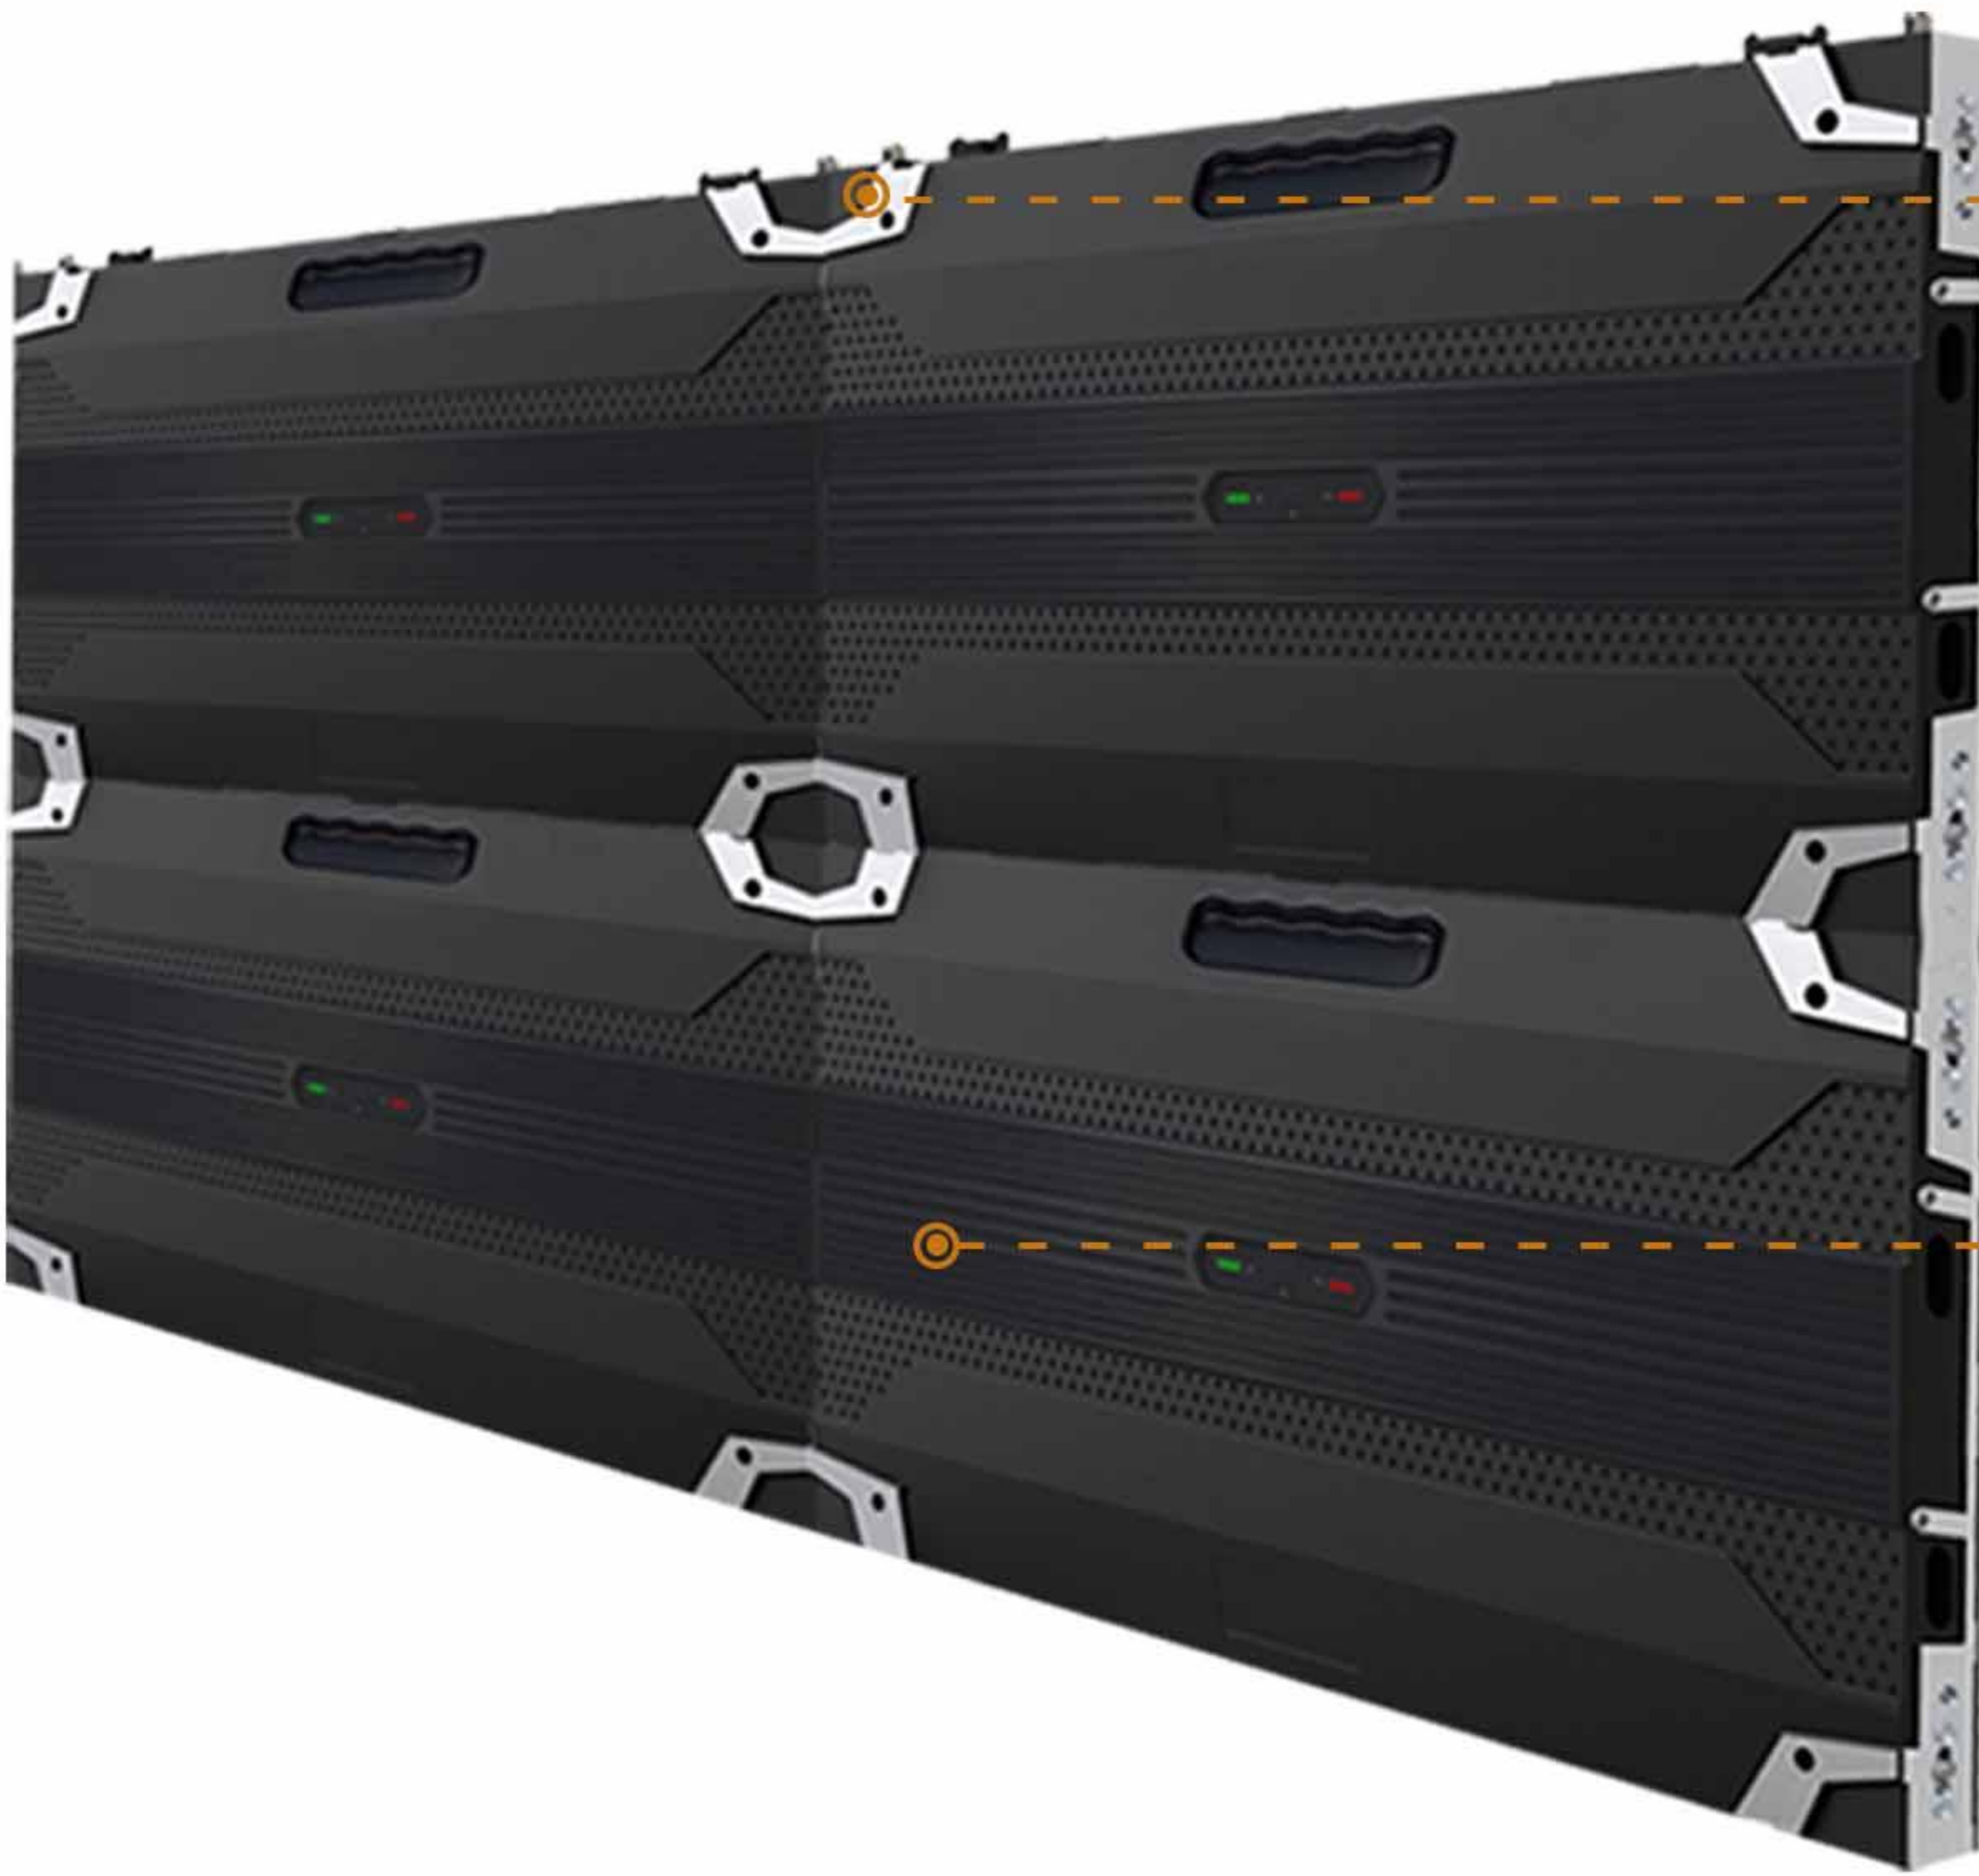


- Fast Lock Design for up-down, left-right
- Easy Installation & Maintenance
- Cable Free Design



- Die Casting Aluminum Cabinet with high precision

Standard 16:9 Size Pixel to Pixel 4K&FHD Resolutions

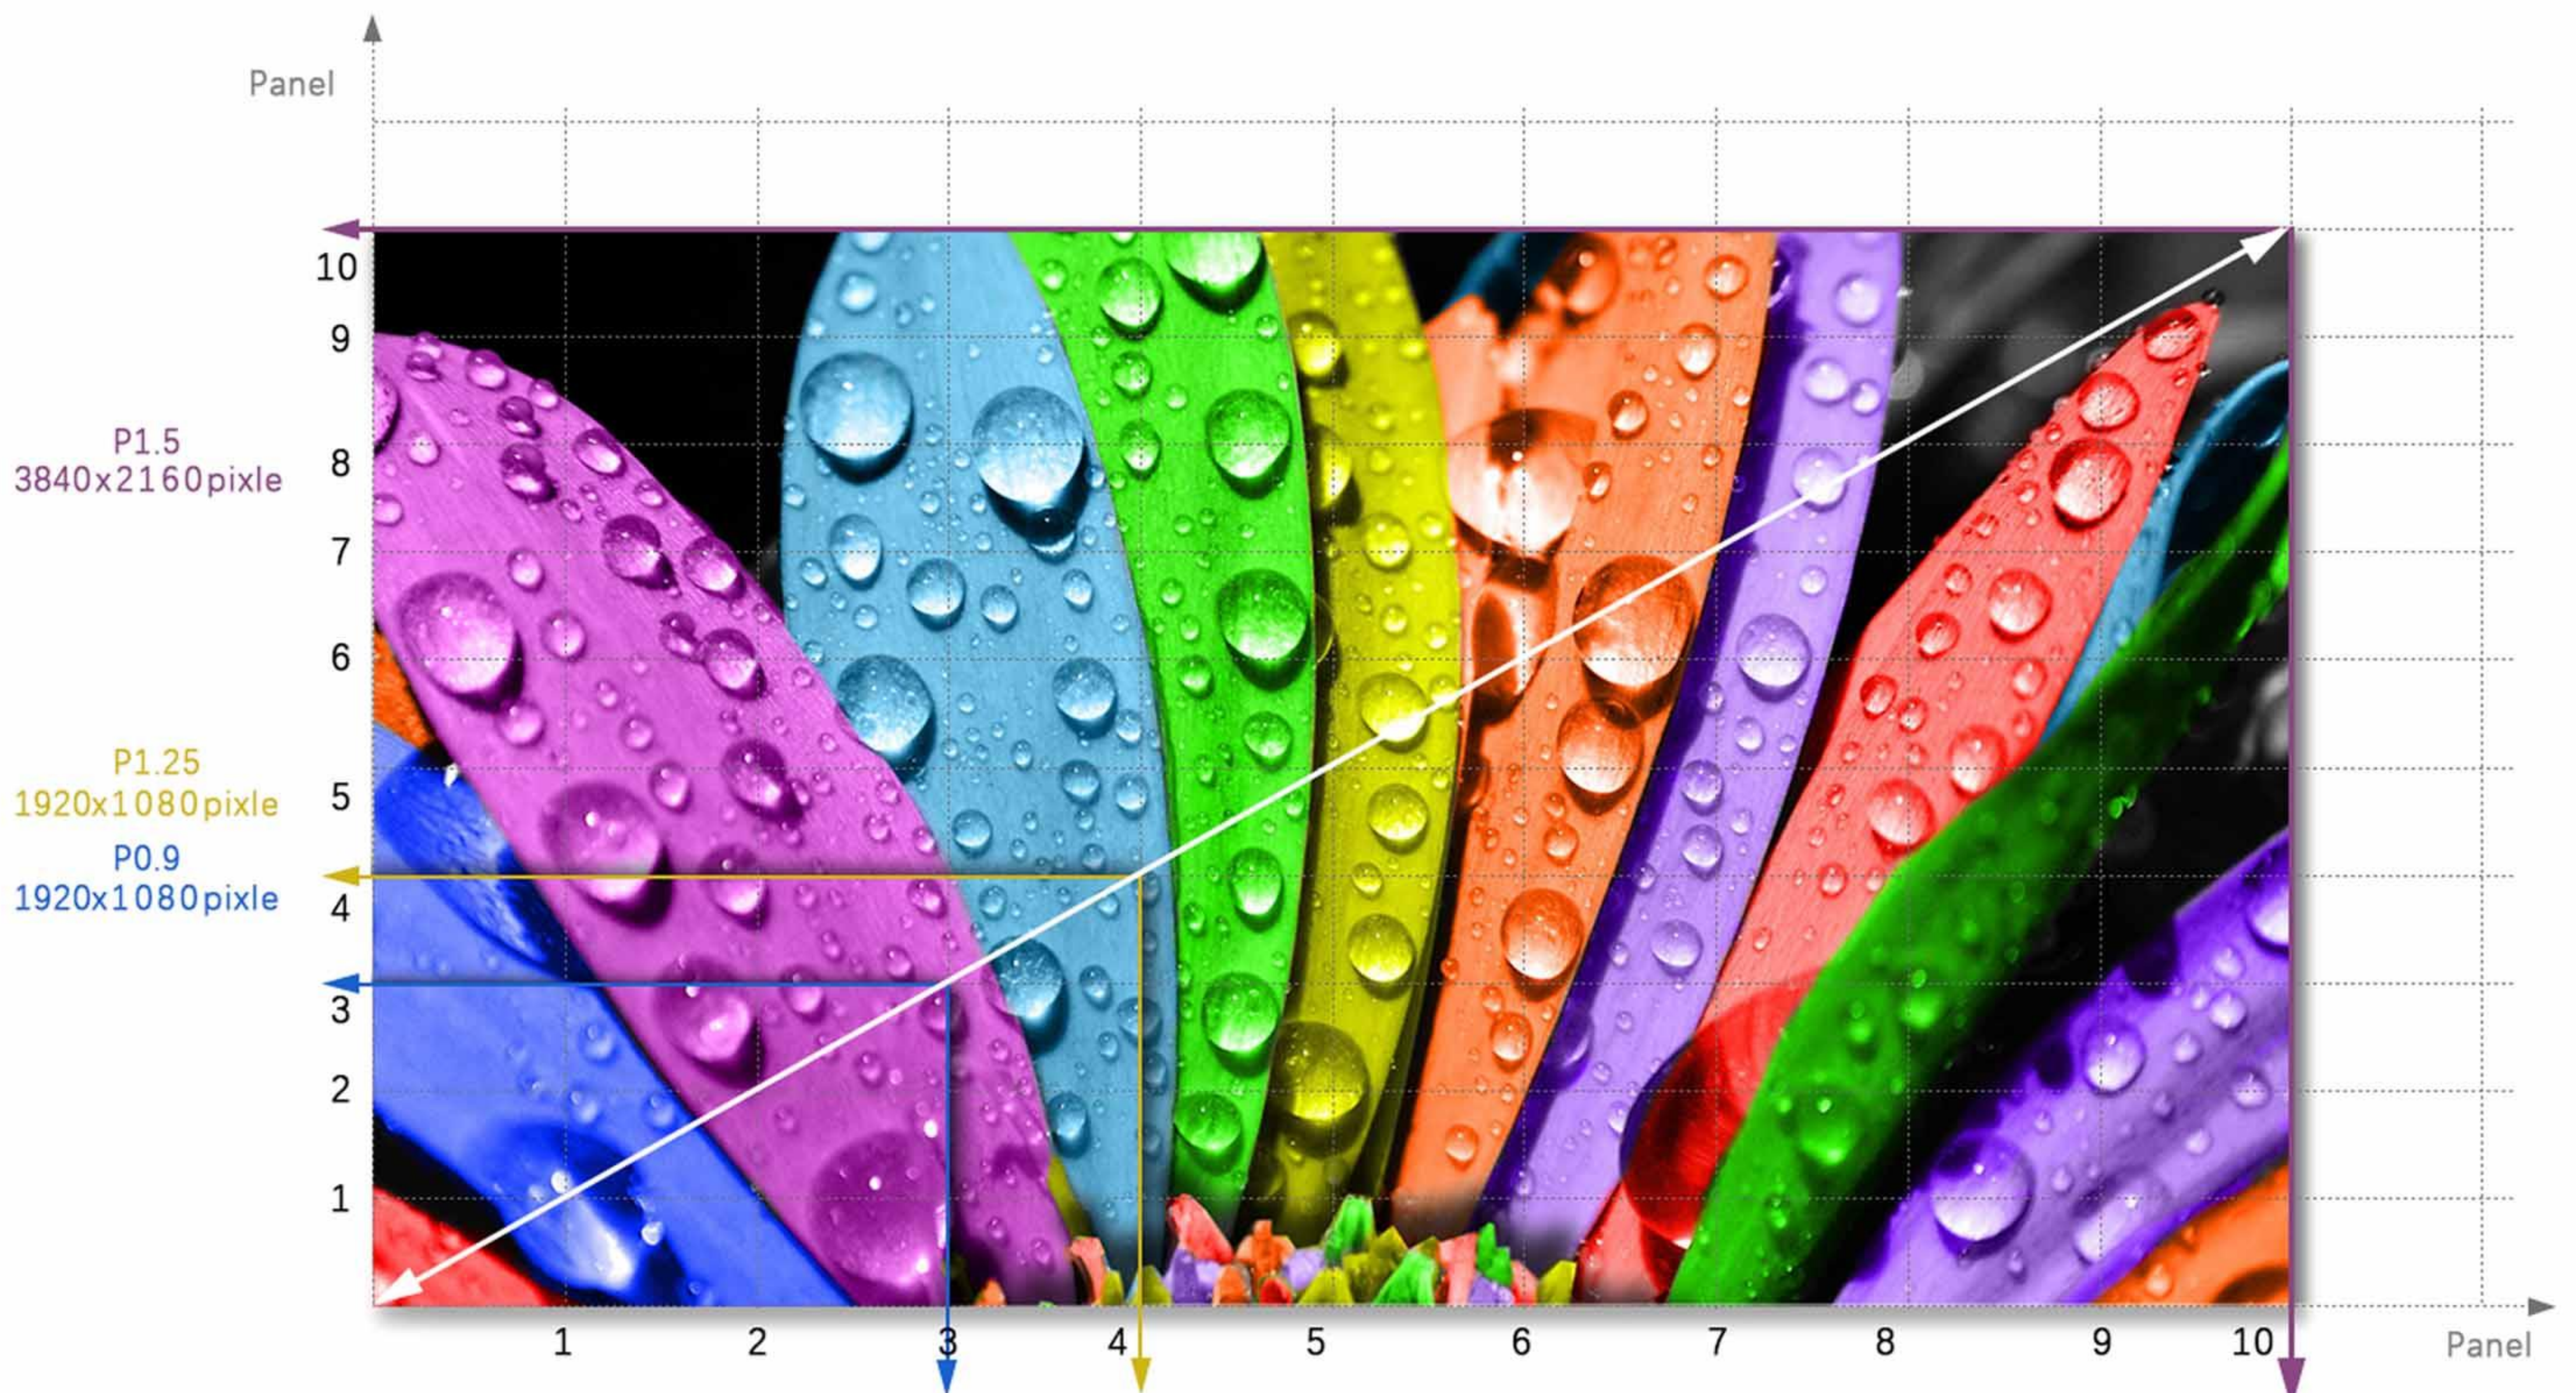

www.newstar-led.com

SHENZHEN NEWSTAR OPTOELECTRONICS CO., LTD


No.10, Kukeng Ave., Tongfuyu Industry Park,
Guanlan Str. Longhua District, Shenzhen City, China




(86) 755 2946 9129

(86) 131 2896 3818


info@newstar-led.com

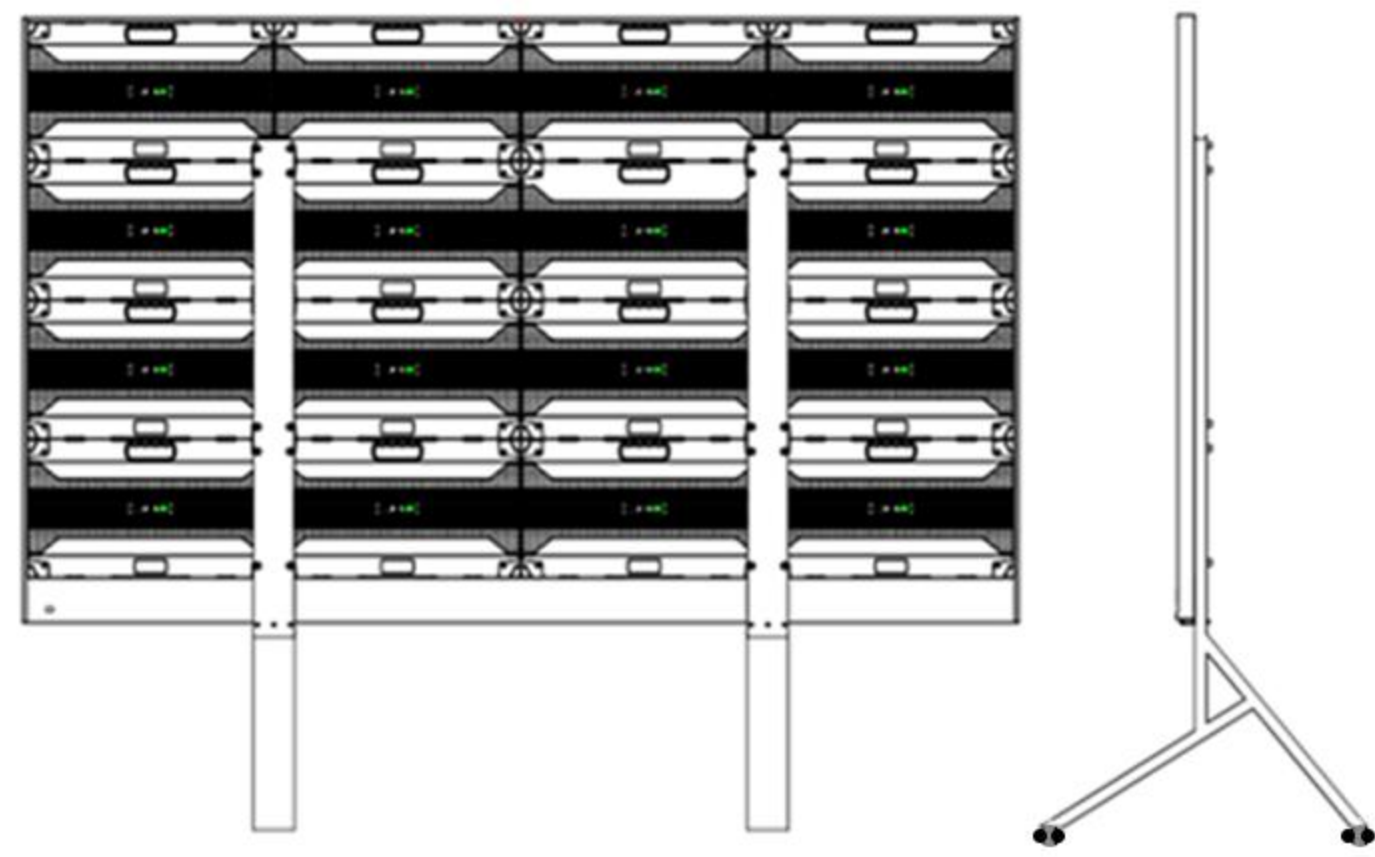

MOBILE ALL-IN-ONE MACHINE INSTALLATION

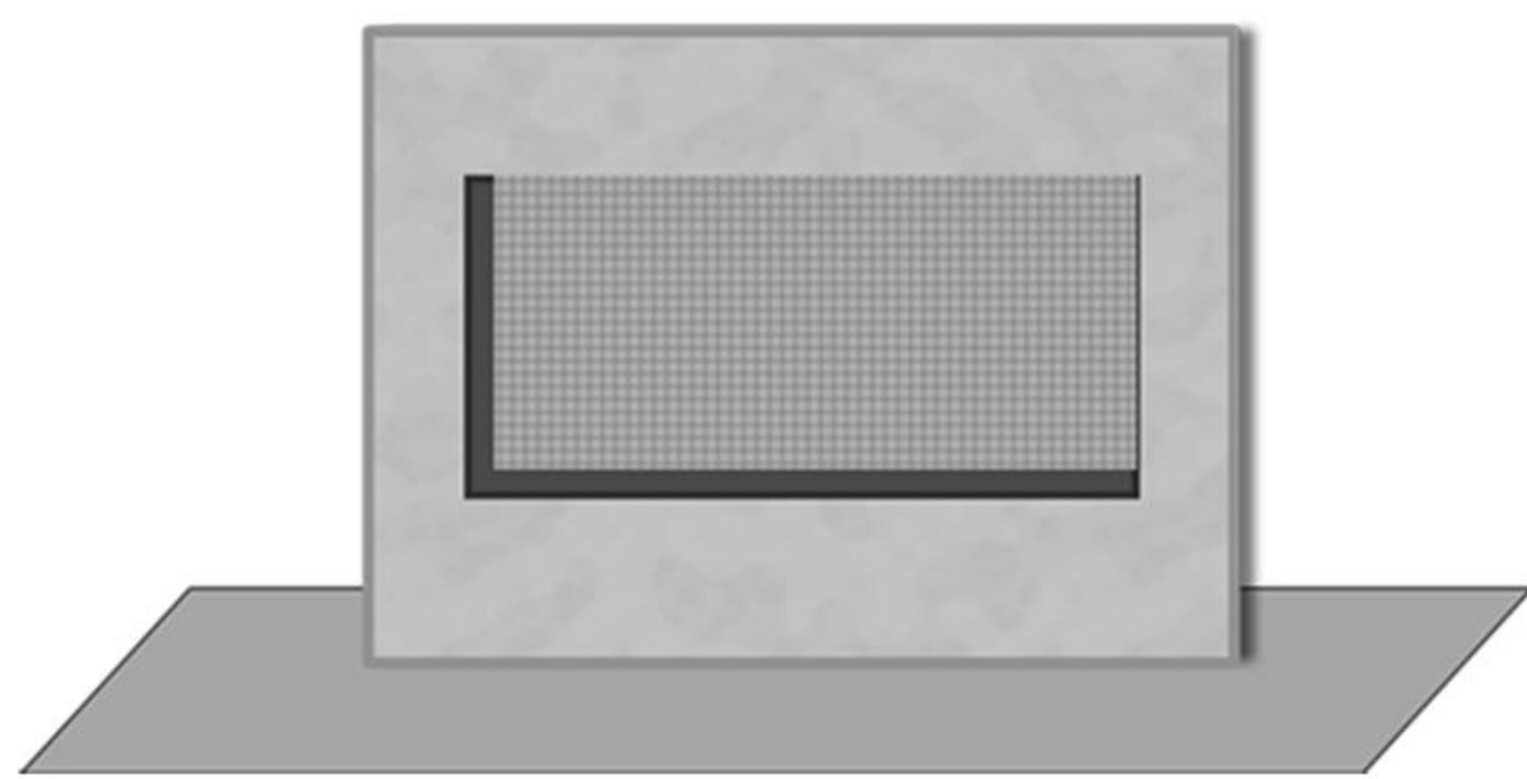

EMBEDDED INSTALLATION

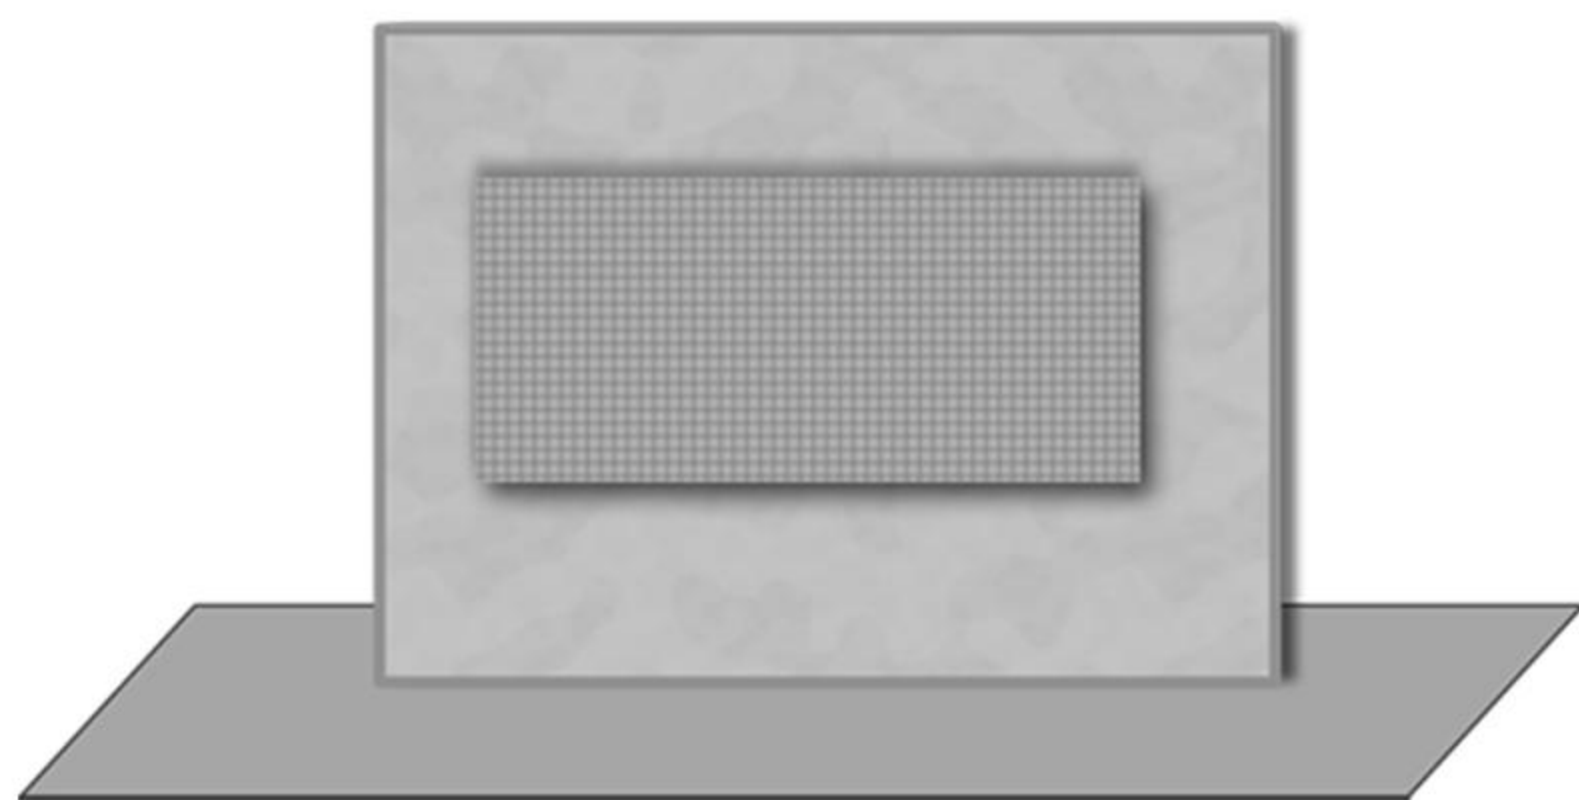

WALL-MOUNTED INSTALLATION



STACKING INSTALLATION



www.newstar-led.com



(86) 755 2946 9129



(86) 131 2896 3818



info@newstar-led.com

SHENZHEN NEWSTAR OPTOELECTRONICS CO., LTD



No.10, Kukeng Ave., Tongfuyu Industry Park,
Guanlan Str. Longhua District, Shenzhen City, China



www.newstar-led.com

SHENZHEN NEWSTAR OPTOELECTRONICS CO., LTD
No.10, Kukeng Ave., Tongfuyu Industry Park,
Guanlan Str. Longhua District, Shenzhen City, China



(86) 755 2946 9129



(86) 131 2896 3818



info@newstar-led.com

NewStar

Display Solution

SHENZHEN NEWSTAR OPTOELECTRONICS CO., LTD

No.10, Kukeng Ave., Tongfuyu Industry Park,
Guanlan Str. Longhua District, Shenzhen City, China

+86 131 2896 3818

info@newstar-led.com

www.newstar-led.com

